

SKF QuickCollect sensor

Machine monitoring made easy



SKF QuickCollect sensor

The SKF QuickCollect sensor is an easy to use bluetooth enabled handheld sensor that connects to apps on your tablet, smart phone or smart watch. Combining vibration and temperature sensing, overall data can be viewed on the spot in real time or pushed to the cloud for future analysis.

This SKF QuickCollect sensor is ideal for service, reliability, operations, or maintenance personnel as part of a walk around data collection program.

Features

- Velocity, acceleration enveloping, and temperature measurements
- Bluetooth communication with tablets, smart phones, smart watches
- Easy to use sensor and apps
- Easy to understand indications of machine condition
- Rugged industrial design – Drop test 1,8 m (6 ft.), water and dust resistant (IP65)
- Suitable for use in hazardous environments (ATEX Zone 1, Class 1, Div 1)
- Rechargeable lithium battery (8 hours normal usage)
- Option to connect, store and share data on the Cloud
- Option to connect directly to SKF Remote Diagnostic Services

Benefits

- Gets you started quickly
- Can be used with minimum training and experience
- Identify developing rotating machinery issues before they become problems
- Connect directly to expert advice when you need it
- Expand functionality via apps to grow and compliment your existing maintenance program

Controls and indicators




1. Power button – Powers the sensor on and off.
2. Battery LED – (Green, Red) Indicates status of battery charge
3. Communication LED – (Green, Red) Indicates whether the sensor is connected to an app. Also indicates when firmware updates are in progress.
4. All purpose check LED – (Green, Red, Amber) Indicates error conditions

Measurement displays

Measurements taken by the sensor are shown on your mobile device, which displays velocity, acceleration, and temperature as shown below:


Each reading displays a current overall measurement, including alarm status, minimum and maximum values, and alert and danger thresholds.

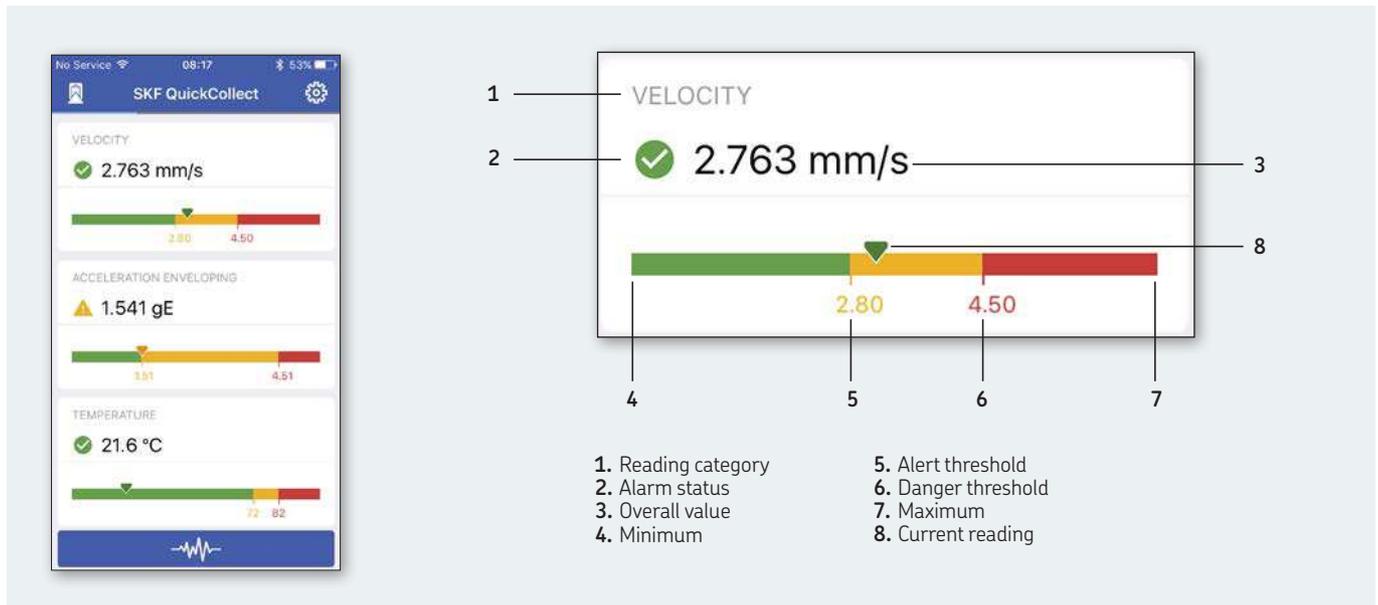

SKF Enlight QuickCollect System

The SKF QuickCollect sensor can be used with the SKF QuickCollect app, or with SKF DataCollect app which provides additional functionality, including the ability to store

and share data via the SKF cloud, and to directly access SKF Remote Diagnostic Services.

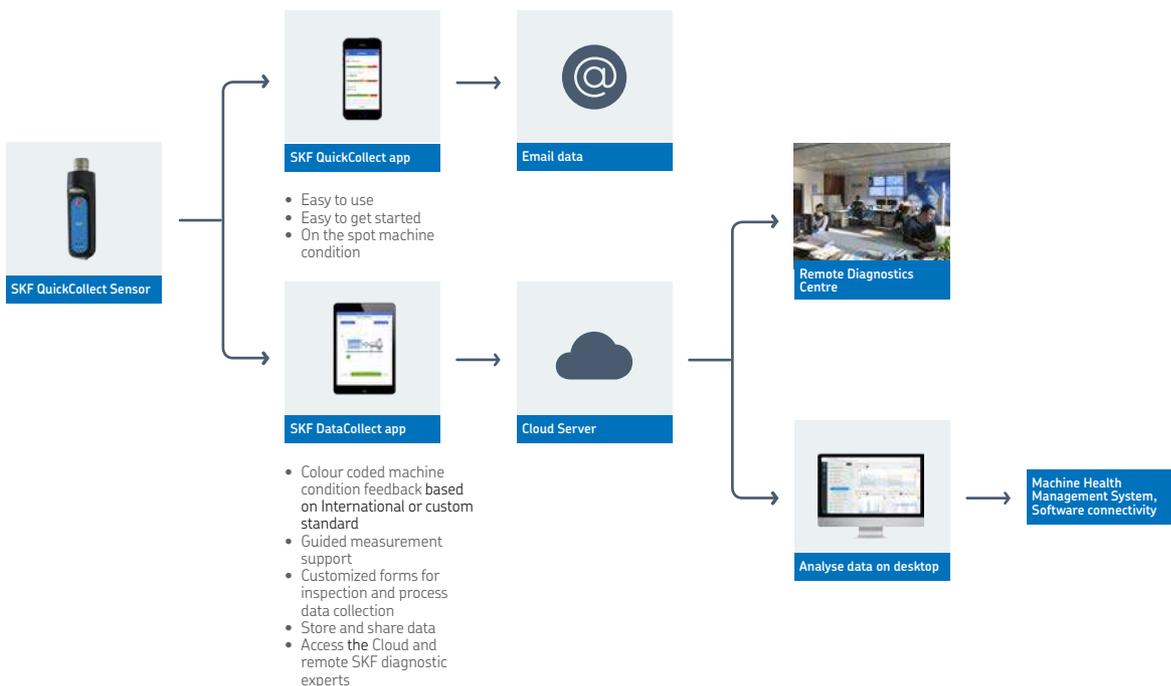

Technical specifications

Environmental and regulatory specifications

Temperature range	Non-hazardous areas: -20 to +60 °C Hazardous areas: -20 to +60 °C Charging: 0 to +40 °C
Humidity	95% non-condensing
IP rating	IP 65, Dust and water ingress protection testing standard.
Hazardous approval (North America)	Class 1 Division 1 Group A, B, C, D certification
Hazardous approval (Europe)	Class 1 Zone 1 (pending) ATEX Zone 1 certification (pending) Area = II (non-mining) Category = 2G (Zone 1) Ex ib IIC T4
Radio Approvals CE Mark	Europe (CE), USA (FCC), Canada (IC) CE approved

Measurement range

Overalls	
Velocity:	10 Hz to 1 kHz up to 55 mm/s
Bearing condition: FFT	SKF patented Envelope acceleration up to 20 gE
Maximum Frequency:	Velocity 1 kHz, Enveloped Acceleration 2 kHz
Lines of resolution:	Velocity 400, Enveloped acceleration 800
Detection type:	Velocity RMS, Enveloped acceleration True Peak to Peak

Power

Main Power	Rechargeable lithium battery, 3,7V DC, 0,14 A
Battery Lifetime	Eight hours with normal usage
MAINS supply voltage, charger	Varies up to ±10% of the nominal voltage TRANSIENT OVERVOLTAGE CATEGORY II; POLLUTION DEGREE 2
Charger	Input 5 V DC ± 10%, 1 A
AC Adapter	Input 100 to 240 V DC, 0,4 A, 47 to 63 Hz Output 5 V DC, 1,6 A

Environmental

Storage Temperature	-20 to +45 °C (-5 to +115 °F) for less than one month -20 to +35 °C (-5 to +95 °F) for less than six months
Operating Temperature, Battery	0 to +40 °C (32 to +105 °F) for charging -20 to +60 °C (-5 to +140 °F) for discharging
Operating Temperature, Charger	0 to +40 °C (32 to +105 °F)
Altitude	Up to 2 000 m (6 560 ft.)
Humidity	95% non-condensing

Physical

Case	Water and dust resistant (IP65)
Drop test	1,8 m (6 ft.) to concrete
Dimensions	45 x 45 x 135 mm (1.8 x 1.8 x 5.3 in.)
Weight	200 g (7 oz.)