



DESIGN A

Solid hub size 9 and 14 for 4-spikes elastomer, size 19 for 6-spikes elastomer




DESIGN B

Solid hub from size 24 to 38 for 8-spikes elastomer

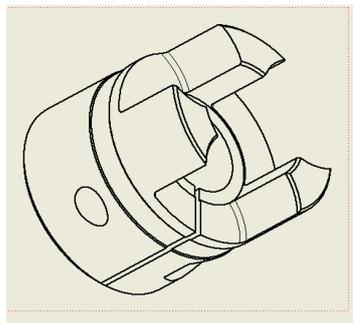


DESIGN C

With single-cut clamp from size 9 to size 19, torques suitable according to hole-diameter.
 Also available with the compact version from size 9 to size 38




DESIGN CK

With single-cut clamp and keyway acc.to DIN 6885 - JS9 , from size 14 to size 19. Also available with the compact version from size 9 to size 38

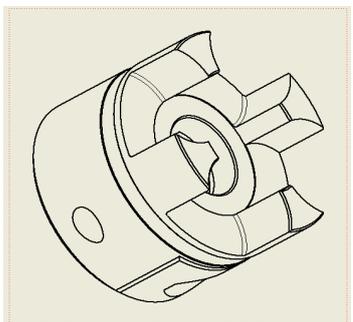


DESIGN D

With double-cut clamp from size 24 to size 38, torques suitable according to hole-diameter




DESIGN DK

With double-cut clamp and keyway acc.to DIN 6885 - JS9 , from size 24 to size 38

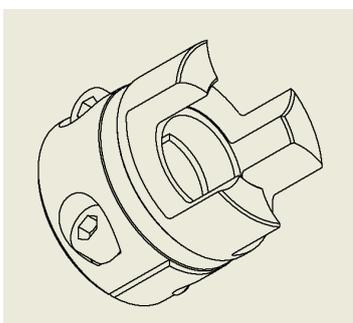

DESIGN H

With 2x screws fixing clamp for radial mounting, torques suitable according to hole-diameter. Available from size 14 to size 42



DESIGN HK

With 2x Screws fixing clamp for radial mounting and keyway acc.to DIN 6885-JS9. Available from size 14 to size 42